



series 38

**AAMA 2604-05**

super durable powder coatings  
volume 1

**EUROPE**

**AUSTRIA**

TIGER Coatings GmbH & Co. KG  
A-4600 Wels  
phone +43 / (0)7242 / 400-0  
fax +43 / (0)7242 / 650 08  
office@tiger-coatings.com  
www.tiger-coatings.com

**BELGIUM**

TIGER Coatings Belgium bvba  
BE-3640 Kinrooi  
phone +32 / (0)89 / 70 00 16  
fax +32 / (0)89 / 56 78 58  
office.be@tiger-coatings.com

**BOSNIA & HERZEGOVINA**

KLIO d.o.o.  
BiH-75300 Lukavac  
phone +387 / (0)35 / 555 392  
fax +387 / (0)35 / 553 256  
kilo@klio.ba

**BULGARIA**

Deyacolor LTD  
BG-1113 Sofia 13 post box no. 265  
phone/fax +359 / (0)2 978 58 61  
office@deyacolor.com

**CROATIA**

KLIO d.o.o.  
CRO-10360 Zagreb/Sesvete  
phone +385 / (0)1 / 200 90 41  
fax +385 / (0)1 / 200 90 43  
klio@klio.hr

**CZECH REPUBLIC**

TIGERLAK, s.r.o.  
CZ-620 00 Brno  
phone +420 / (0)545 429 110  
fax +420 / (0)545 229 209  
office.cz@tiger-coatings.com

**DENMARK**

Ms. Brigitte Pudor Gullev  
DK-6200 Aabenraa  
phone +45 / 73 62 13 23  
mobil +45 / 21 20 45 20  
fax +45 / 73 62 13 24  
office.dk@tiger-coatings.com

**HP Masking ApS**

DK-7100 Vejle  
phone +45 / (0)7586 / 3611  
fax +45 / (0)7586 / 3621  
info@hpmasking.dk

**FRANCE**

TIGER S.A.R.L.  
F-69480 Anse  
phone +33 / (0)474 / 67 13 70  
fax +33 / (0)474 / 67 10 42  
office.fr@tiger-coatings.com

**GERMANY**

KLOZ Kunststofftechnik GmbH  
D-70736 Fellbach-Oeffingen  
phone +49 / (0)711 / 95 19 80 32  
fax +49 / (0)711 / 518 07 50  
info@kloz-kunststofftechnik.de

**KLOZ Wickede**

D-58739 Wickede-Ruhr  
phone +49 / (0)2377 / 36 25  
fax +49 / (0)2377 / 26 22

**Jochen Hänel Handelsvertretung**

D-65239 Hochheim a. M.-Süd  
phone +49 / (0)6146 / 83 58 81  
fax +49 / (0)6146 / 83 58 84  
jochen.haenel@tiger-coatings.com

**Boris Herrmann Handelsvertretung**

D-44309 Dortmund  
phone +49 / (0)231 / 25 70 12  
fax +49 / (0)231 / 25 70 15  
b.herrmann@tiger-coatings.com

**Thomas Leitzke Handelsvertretung**

D-47647 Kerken  
phone +49 / (0)2833 / 57 39 32  
fax +49 / (0)2833 / 57 39 33  
thomas.leitzke@tiger-coatings.com

**GREAT BRITAIN**

TIGER COATINGS UK LTD  
Solihull, West Midlands, B93 9EG  
phone +44 / (0) 1564 778 866  
fax +44 / (0) 1564 778 903  
office.gb@tiger-coatings.com

**HUNGARY**

TIGERLAKK Kft.  
H-1183 Budapest  
phone +36 / 1 / 293 90 20  
fax +36 / 1 / 297 45 49  
office.hu@tiger-coatings.com

**ITALY**

TIGER Drylac Italia  
I-24122 Bergamo (BG)  
phone +39 / 035 / 413 35 80  
fax +39 / 035 / 27 03 87  
office.it@tiger-coatings.com

**LITHUANIA, LATVIA**

UAB „LAKMALIT“  
LT-3000 Kaunas  
phone +370 / 7 / 32 37 41, 32 34 95  
fax +370 / 7 / 32 40 87  
kaunas@lakmalit.lt

**THE NETHERLANDS**

Mr. Ben de Jong  
NL-2133 GJ Hoofddorp  
phone +31 / (0)6 / 419 956 80  
fax +31 / (0)23 / 565 58 72  
office.nl@tiger-coatings.com

**POLAND**

Tensor Consulting  
PL-04512 Warszawa  
phone +48 / (0)22 / 815 42 79  
fax +48 / (0)22 / 815 42 79  
ajelonek@tensor.com.pl

**ROMANIA**

TIGER Coatings Romania S.R.L.  
RO-010631 Bucuresti  
phone +40 / (0)21 / 314 77 37  
fax +40 / (0)21 / 314 77 87  
office.ro@tiger-coatings.com

**RUSSIA**

OOO TECHNOKOLOR-M  
107370 Moscow, Russia  
phone +007 / (0)495 / 966 75 08  
fax +007 / (0)495 / 963 47 45  
sales@technokolor.ru

**SERBIA & MONTENEGRO**

KLIO NS d.o.o.  
YU-21000 Novi Sad  
phone +381 / (0)21 / 478 01 08  
fax +381 / (0)21 / 641 00 40  
kilo\_ns@yahoo.com

**SLOVAKIA**

TIGERLAK Slovakia spol.s ro.  
Moyzesová 4  
SK-902 01 Pezinok  
phone +421 / (0)33 / 640 00 71  
fax +421 / (0)33 / 640 00 72  
office.sk@tiger-coatings.com

**SLOVENIA**

T-Lotus d.o.o.  
SLO-9240 Ljutomer  
phone +386 / (0)2 / 583 18 79  
fax +386 / (0)2 / 583 18 80  
kontakt@t-lotus.si

**SPAIN**

Oscar Illanas  
12540 Vila-Real (Castellón) - Spain  
phone +34 / (0)964 / 05 03 09  
fax +34 / (0)964 / 05 03 09  
office.es@tiger-coatings.com

**SWITZERLAND**

FEYCO AG  
CH-9430 St. Margrethen SG  
phone +41 / (0)71 / 747 84 11  
fax +41 / (0)71 / 747 85 10  
info@feyco.ch

**UKRAINE**

Interfarb - Ukraina  
UA-79012 Lvov  
phone/fax +380 / (0)322 / 40 23 11  
phone/fax +380 / (0)322 / 97 10 76  
interfarb@utel.net.ua

**AFRICA**

**EGYPT**

TIGER Coatings Egypt (LTD)  
Cairo, 11828, Egypt  
phone +20 / 2 / 46 65 14 55  
fax +20 / 2 / 46 65 04 31  
office.eg@tiger-coatings.co

**THE AMERICAS**

**ARGENTINA**

Glass + Partner S.A.  
AR-1429 Buenos Aires  
phone +54 / 114 / 541 70 58  
fax +54 / 114 / 541 70 58  
glasspartner@arnet.com.ar

**BRAZIL**

TIGER Drylac do Brasil Ltda.  
13295-000 ITUPEVA SP  
phone +55 / 11 / 44 96 53 27  
fax +55 / 11 / 44 96 65 14  
office.br@tiger-coatings.com

**CANADA**

TIGER Drylac Canada Inc.  
Guelph, Ontario, N1G 4P5  
phone +1 / 800 / 243 81 48  
fax +1 / 519 / 766 47 87  
office.ca@tiger-coatings.com

**Warehouse Alberta I**

Calgary, Alberta Canada T2C 4Y7  
phone +1 / 800 / 243 81 48  
fax +1 / 519 / 766 47 87  
office.ca@tiger-coatings.com

**Warehouse Alberta II**

Edmonton, Alberta Canada T5S 2X2  
phone +1 / 800 / 243 81 48  
fax +1 / 519 / 766 47 87  
office.ca@tiger-coatings.com

**Warehouse Manitoba**

Winnipeg, MB, R3P 1A6  
phone +1 / 800 / 243 81 48  
fax +1 / 519 / 766 47 87  
office.ca@tiger-coatings.com

**Warehouse British Columbia**

Richmond, BC, V6W 1L8  
phone +1 / 800 / 243 81 48  
fax +1 / 519 / 766 47 87  
office.ca@tiger-coatings.com

**CHILE**

TIGER Drylac de Chile Ltda.  
Iquique, 6861 – Comuna La Cisterna  
Santiago, Chile  
phone +56 / 2 / 511 56 59  
fax +56 / 2 / 511 56 59  
office.cl@tiger-coatings.com

**MEXICO**

TIGER Drylac MEXICO S.A. DE C.V.  
Col. Santa Cruz Acatlan, Naucalpan  
Edo. de Mexico C.P. 53150  
phone +52 / 555 / 363 12 14  
fax +52 / 555 / 363 17 39  
office.mx@tiger-coatings.com

**TIGER Drylac MEXICO S.A. DE C.V.**

Circuito Exportación #212  
Parque Industrial Tres Naciones –  
Segunda etapa  
San Luis Potosi, SLP, C.P. 78395  
phone +52 / 444 / 799 72 43  
fax +52 / 444 / 799 72 44  
mexico-slp@tiger-coatings.com

**U.S.A.**

TIGER Drylac U.S.A., Inc. (HQ's)  
Reading, PA 19605  
phone +1 / 800 / 243 81 48  
fax +1 / 610 / 926 81 49  
customerserviceeast@tiger-coatings.us

TIGER Drylac U.S.A., Inc.  
Ontario, CA 91761  
phone +1 / 800 / 243 81 48  
fax +1 / 909 / 930 91 11  
customerservicewest@tiger-coatings.us

TIGER Drylac U.S.A., Inc.  
St. Charles, IL 60174  
phone +1 / 800 / 243 81 48  
fax +1 / 630 / 513 99 98  
customerservicecw@tiger-coatings.us

**Warehouse Texas**

Dallas, TX 75233  
phone +1 / 800 / 243 81 48  
fax +1 / 817 / 277 19 31  
customerservicesouth@tiger-coatings.us

**Warehouse Georgia**

Jonesboro, GA 30237  
phone +1 / 800 / 243 81 48  
fax +1 / 770 / 218 24 95  
customerserviceeast@tiger-coatings.us

**Warehouse Oregon**

Portland, OR 97224  
phone +1 / 800 / 243 81 48  
fax +1 / 909 / 930 91 11  
customerservicewest@tiger-coatings.us

**ASIA**

**CHINA**

TIGER Drylac (Taicang) Co. Ltd.  
Taicang, Jiangsu 215400  
P.R. China  
phone +86 / (0)512 / 53 56 06 19  
fax +86 / (0)512 / 53 56 43 16  
office.cn@tiger-coatings.com

**TIGER Drylac Beijing Warehouse**

Shibali dian Chaoyang, Beijing  
P.R. China  
phone +86 / (0)10 / 87 30 48 66  
fax +86 / (0)10 / 87 30 51 47

**TIGER Drylac Guangzhou Warehouse**

Nancun town, Panyu Guangzhou  
P.R. China  
phone +86 / (0)20 / 61 91 28 38  
fax +86 / (0)20 / 61 91 28 38

**INDIA**

National Corporation  
Bangalore-560 002, INDIA  
phone +91 / (0)80 / 222 265 54  
fax +91 / (0)80 / 413 250 29  
nationalcorp2000@yahoo.com

**JAPAN**

TIGER Drylac JAPAN K.K.  
Kanagawa, 229-1135, JAPAN  
phone +81 / (0)42 / 760 60 56  
fax +81 / (0)42 / 760 60 57  
office.jp@tiger-coatings.com

**MALAYSIA**

TIGER Drylac MALAYSIA Sdn. Bhd.  
50250, Kuala Lumpur  
phone +60 / (0)3 / 20 39 43 15  
fax +60 / (0)3 / 20 31 83 59  
office.my@tiger-coatings.com

**SINGAPORE**

TIGER Drylac SINGAPORE Pte. Ltd.  
SINGAPORE 759196  
phone +65 / (0)67 59 94 33  
fax +65 / (0)67 59 94 36  
office.sg@tiger-coatings.com

**TAIWAN**

Vigoroussport Int. Co., Ltd.  
Taichung, TAIWAN  
phone +886 / (0)4 / 23 82 21 23  
fax +886 / (0)4 / 23 82 21 11  
office.tw@tiger-coatings.com

**THAILAND**

Grand Siam Commercial Co., Ltd.  
Bangkok 10320  
phone +66 / (0)2 / 691 62 74  
fax +66 / (0)2 / 691 22 25  
apichart@samart.co.th

**VIETNAM**

TIGER Drylac Vietnam Co., Ltd.  
Binh Duong Province  
phone +84 / (0)650 / 3 758 370  
fax +84 / (0)650 / 3 758 371  
mobile +84 / (0)908 / 462 998  
tien.le@tiger-coatings.com

**TIGER Drylac Ha Noi Warehouse**

Ha Noi  
phone +84 / (0)4 / 3 762 81 65  
fax +84 / (0)4 / 3 762 81 64



# TIGER Drylac® Series 38 – Exterior or Interior

A highly weather and UV resistant powder coating based on Super Durable TGIC Polyester

<b>Features</b>	Superior Gloss and Color Retention Excellent Weather Resistance Good Mechanical Properties Superior Chalking Resistance Very Smooth Flow Excellent Edge Coverage Good Storage Stability
-----------------	---

<b>Typical Applications</b>	Architectural Applications Land Management Facilities Cell Phone Towers Construction Industry Lighting Fixtures Park Furniture Playground Equipment Garage Doors Stadium Seating Fencing	Oil & Gas Industry Renewable Energy Industry Defense Industry Automotive Equipment Marine Applications Agricultural Equipment Sports Equipment Recreational Vehicles Lawn and Garden Equipment Railing
-----------------------------	---	---

<b>Standard Series 38</b>	Smooth Matte (20±5*) Smooth Matte Satin (30±5*) Smooth Semi Gloss (60±5) Smooth Glossy (85±5*) <small>Gloss level according to Gardner 60° ASTM D523</small>
---------------------------	--

<b>Custom Colors</b>	Any other color or finish is available as a custom color with a 220-lb. minimum order. Due to pigmentation a small percentage of colors in the yellow, orange, red and purple range offer only limited UV stability. UV stability of custom color products in that color range must be verified by our production laboratories on a case by case basis.
----------------------	---


<b>Standard Packaging</b>	44 lbs/20 kg carton or 5 lbs/2.5 kg Minipack
---------------------------	--

<b>Specific Gravity</b>	1.2 – 1.8 g/cm <sup>3</sup> depending on pigmentation
-------------------------	---

<b>Theoretical Coverage</b>	Depending on pigmentation and processing conditions. 1 lb coats approx. 50 sq. ft. at 3 mils avg. 1 kg coats approx. 10 sq. m. at 75 microns avg.
-----------------------------	---

<b>Processing</b>	Electrostatic and Tribo/Airstatic Spraying, manual or automatic.
-------------------	--

<b>Dry Storage Stability</b>	6 months at no more than 77° F/25° C
------------------------------	--------------------------------------
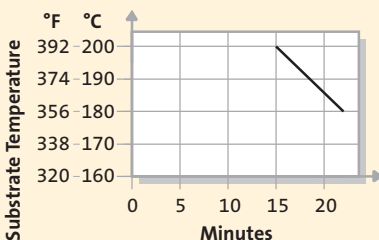
<b>Cure Parameter</b>	
-----------------------	---

<b>Note</b>	A reasonable degree of loss of gloss and color variation due to long-term UV exposure can be expected.
-------------	--

On the cover:  
Raymond James Stadium, Tampa, FL  
Lanikea Tower Honolulu, HI (Hanson Architectural Systems Inc.)  
Street Lighting Fixture

# TIGER SHIELD System

for superior corrosion protection (recommended for marine environments and coastal regions)

## Product Description


The TIGER Drylac SHIELD System is a two-coat process combining optimum corrosion protection with highest weatherability.

The basis for the excellent corrosion resistance is either TIGER Drylac Zinc Rich Primer 69/90500, TIGER Drylac Dryprotective Primer 69/70000 or TIGER Drylac 09/73841 Out-gassing Forgiving Primer. This two coat system warrants an optimum non-porous film as well as excellent UV protection through the use of high quality polyester powder coatings.

## Processing

Electrostatic and Tribo/Airstatic spraying, manual or automatic. All primers must be applied over a clean dry substrate, free of any contaminants and oxidation. Note: Time elapsed between application of TIGER Drylac 69/90500 Dryzinc Primer and topcoating with TIGER Drylac Series 38 Polyester must not exceed 12 hours max.

## Steel/Iron

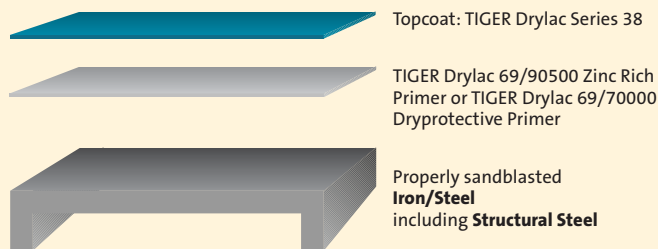

## Aluminum

Under normal conditions a single coat of Series 38 powder coating is sufficient. In highly corrosive environments, as is found in coastal regions or industrial atmospheres, a 2-coat system comprised of TIGER Drylac Dryprotective 69/70000 plus a topcoat of Series 38 can be beneficial. Both products are engineered to complement each other and offer an excellent corrosion barrier. For objects exposed to extreme conditions, especially where there is a possibility of filiform corrosion, Chromate Conversion coatings or Chrome Phosphating has been proven to be an excellent pretreatment choice.


## Cast Aluminum and Cast Steel

For porous substrates that are prone to out-gassing we offer a Out-gassing Forgiving Primer — TIGER Drylac OGF Primer 09/73841. For technical information and specific curing parameters please see our datasheet number 1304 online at [www.tiger-coatings.us](http://www.tiger-coatings.us) (download area, data sheets).

## Cure Parameters

TIGER Drylac Zinc Rich and Dryprotective Primer

In general, we recommend only partial rather than full cure for the first coat.

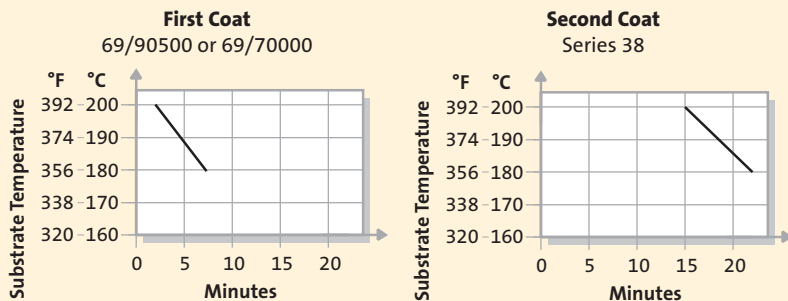

## Specific Gravity

TIGER Drylac Series 38: 1.2–1.8 g/cm<sup>3</sup> depending on pigmentation.

TIGER Drylac 69/90500 Zinc Rich Primer: 2.72 ± 0.1g/cm<sup>3</sup>

TIGER Drylac 69/70000 Dryprotective Primer: 1.52 ± 0.1g/cm<sup>3</sup>

## Theoretic Coverage

Depending on pigmentation and processing conditions and a specific gravity of 1.5, 1 lb coats approximately 50 sq. ft. at 3 mils avg. 1 kg coats approximately 10 sq. m. at 75 microns avg.

## Test Results on Aluminum:

<b>Corrosion Resistance</b> Humidity Resistance 3000 hrs.—ASTM D 2247	Formation of blisters not to exceed “few” blisters size #8 as shown in Figure 4.0 ASTM D 714	No blistering
<b>Salt Spray Resistance</b> 3000 hours—ASTM B 117	Minimum rating of 7 on scribe or cut edges, and a minimum blister rating of 8 within the test specimen field, in accordance with the Table 1 and Table 2 Reference modification of ASTM D 1654	No blistering, no undercutting

## Test Results on Steel:

Salt Spray Resistance* ASTM 117-90	Undercutting	Blisters	Adhesion
1000 hour	0	m0 / g0	Gt0
2000 hour	0 – 1	m0 / g0	Gt0
3000 hour	2 – 3	m2 / g1	Gt0

\*Tested on a 2-coat system of Series 38 and TIGER Drylac® 69/90500 Zinc Rich Primer (substrate: steel—sandblasted)

## Mechanical Properties:

Test	Results for basecoat alone 69/90500	Two-Coat System TIGER Drylac 69/90500 + TIGER Drylac Series 38
Film Thickness	2.4-2.6 mils/60±5µm	2.4-2.6 mils/60±5µm (Primer) 2.4-2.6 mils/60±5µm (Topcoat) Minimum requirement for a non-porous film!
Cross Hatch Adhesion ISO 2409 / ASTM D 3359	pass 100%	pass 100%
Mandrel Bending Test ISO 1519 / ASTM D 522	5/32 in. /4 mm (3/16 in./5 mm)	3/8 in./10 mm
Impact test 1/10 in. Distortion ISO 6272 / STM D 2794-90	up to 40 in./lbs. (up to 20 in./lbs.)	up to 40 in./lbs. (up to 20 in./lbs.)
Cupping ISO 1520	5/16 in./8 mm (3/16 in./5 mm)	5/16 in./8 mm (3/16 in./5 mm)

Data in “( )” reflects properties valid for TIGER Drylac 69/70000 Dryprotective.



# TIGER Drylac™ Series 38 Super Durable Polyester Powder Coatings

Our Super Durable Polyester powder coatings are designed and engineered to be a single coat finishing system, with the exception of applications within extremely harsh environments, such as coastal or heavy industry regions (see TIGER Shield information in this brochure).

## AAMA 2604-05 Compliant

All products featured in this brochure comply with the American Architectural Manufacturers Association's specification AAMA 2604-05

## Bureau of Land Management Standard Environmental Colors

The BLM Standard Environmental Colors were developed by the US Government to assist with color selection to minimize the visual contrast of facilities in the landscape.

TIGER Drylac offers BLM colors in an environmentally friendly, long wearing, highly weather and UV resistant Super Durable powder coating formulation.


## TIGER Drylac™ Smooth Glossy RAL Colors available in Series 38:

RAL 1001 • 38/15001	RAL 6007 • 38/50007	RAL 7010 • 38/70014	RAL 8001 • 38/60005
RAL 1002 • 38/20002	RAL 6008 • 38/50008	RAL 7011 • 38/70011	RAL 8002 • 38/60002
RAL 1013 • 38/10013	RAL 6009 • 38/50009	RAL 7012 • 38/70012	RAL 8003 • 38/60003
RAL 1014 • 38/15014	RAL 6010 • 38/50031	RAL 7013 • 38/70013	RAL 8004 • 38/60004
RAL 1015 • 38/15015	RAL 6011 • 38/50011	RAL 7015 • 38/70015	RAL 8007 • 38/60007
RAL 1016 • 38/20016	RAL 6012 • 38/50012	RAL 7016 • 38/70016	RAL 8008 • 38/60008
RAL 1019 • 38/15019	RAL 6013 • 38/50013	RAL 7021 • 38/70021	RAL 8011 • 38/60011
RAL 1020 • 38/20020	RAL 6016 • 38/50016	RAL 7022 • 38/70022	RAL 8012 • 38/60012
RAL 1023 • 38/20023	RAL 6017 • 38/50017	RAL 7023 • 38/70023	RAL 8014 • 38/60010
RAL 1024 • 38/20024	RAL 6018 • 38/50018	RAL 7024 • 38/70024	RAL 8016 • 38/60016
RAL 3012 • 38/30012	RAL 6019 • 38/50019	RAL 7026 • 38/70026	RAL 8017 • 38/60017
RAL 5004 • 38/40004	RAL 6020 • 38/50020	RAL 7030 • 38/70027	RAL 8019 • 38/60019
RAL 5007 • 38/40007	RAL 6021 • 38/50021	RAL 7031 • 38/70031	RAL 8022 • 38/60022
RAL 5008 • 38/40008	RAL 6022 • 38/50022	RAL 7032 • 38/70001	RAL 8023 • 38/60023
RAL 5011 • 38/40011	RAL 6026 • 38/50026	RAL 7033 • 38/70033	RAL 8024 • 38/60024
RAL 5013 • 38/40013	RAL 6027 • 38/50027	RAL 7035 • 38/70035	RAL 8025 • 38/60025
RAL 5017 • 38/40017	RAL 6028 • 38/50028	RAL 7036 • 38/70036	RAL 8028 • 38/60028
RAL 5018 • 38/40020	RAL 6029 • 38/50029	RAL 7037 • 38/70037	RAL 9001 • 38/10001
RAL 5019 • 38/40019	RAL 6032 • 38/50032	RAL 7038 • 38/70038	RAL 9002 • 38/10002
RAL 5020 • 38/40018	RAL 6033 • 38/50033	RAL 7039 • 38/70039	RAL 9003 • 38/10003
RAL 5021 • 38/40021	RAL 6034 • 38/50034	RAL 7040 • 38/70046	RAL 9004 • 38/80004
RAL 6000 • 38/50000	RAL 7000 • 38/70000	RAL 7042 • 38/70042	RAL 9005 • 38/80010
RAL 6001 • 38/50005	RAL 7002 • 38/70007	RAL 7043 • 38/70043	RAL 9010 • 38/10004
RAL 6003 • 38/50003	RAL 7004 • 38/70004	RAL 7044 • 38/70044	RAL 9016 • 38/10010
RAL 6004 • 38/50004	RAL 7005 • 38/70005	RAL 7045 • 38/70045	RAL 9017 • 38/80017
RAL 6005 • 38/50002	RAL 7006 • 38/70006	RAL 7046 • 38/70002	RAL 9018 • 38/10018
RAL 6006 • 38/50006	RAL 7009 • 38/70009	RAL 7047 • 38/70047	

Please refer to our RAL Exterior brochure for a display of RAL colors to go with above listed Series 38 product numbers. Gloss levels for RAL colors are 85±5.

To eliminate possible errors in finish and sheen, please specify the TIGER Drylac product number along with the RAL number.

## Primer



TIGER Drylac 69/70000  
**Dry Protector Primer 3±2**



TIGER Drylac 69/90500  
**Zinc Rich Primer 70±5**



TIGER Drylac 09/73841  
**Out-gassing Forgiving Primer 70±5**

## Architectural Matte, Satin and Semi Gloss



TIGER Drylac® 38/10130  
**Seashell White** 30±5\*



TIGER Drylac® 38/70070  
**Taupe** 30±5\*



TIGER Drylac® 38/60014  
**Medium Bronze** 30±5\*



TIGER Drylac® 38/30028  
**Brick Red** 20±5\*



TIGER Drylac® 38/70049  
**Silver Grey** 30±5\*




TIGER Drylac® 38/10070  
**Bone White** 30±5\*



TIGER Drylac® 38/15002  
**Sierra Tan** 30±5\*



TIGER Drylac® 38/60080  
**Statuary Bronze** 30±5\*



TIGER Drylac® 38/60006  
**Aged Copper** 20±5\*



TIGER Drylac® 38/40025  
**Interstate Blue** 20±5\*



TIGER Drylac® 38/70048  
**Sky Grey** 30±5\*




TIGER Drylac® 38/70025  
**Ash Grey** 30±5\*




TIGER Drylac® 38/60090  
**Dark Anodized Bronze** 20±5\*



TIGER Drylac® 38/50080  
**Ivy Green** 30±5\*



TIGER Drylac® 38/40051  
**Military Blue** 30±5\*



TIGER Drylac® 38/15003  
**Almond** 30±5\*



TIGER Drylac® 38/70019  
**Slate Grey** 30±5\*



TIGER Drylac® 38/30033  
**Boysenberry** 20±5\*



TIGER Drylac® 38/50037  
**Classic Green** 30±5\*



TIGER Drylac® 38/80020  
**Jet Black** 30±5\*



TIGER Drylac® 38/15012  
**Sandstone** 30±5\*



TIGER Drylac® 38/60018  
**Koko Brown** 30±5\*



TIGER Drylac® 38/30041  
**Redwood** 30±5\*



TIGER Drylac® 38/50110  
**Hartford Green** 30±5\*



TIGER Drylac 38/81009  
**Railing Black Semi Gloss** 60±5\*

\*Gloss level according to Gardner 60° ASTM D523. Paper and ink limitations of color samples as well as influence from heat and light account for differences from actual powder coatings.

## Glossy

## Metallic



TIGER Drylac® 38/00001  
**Clear 90+\***



TIGER Drylac® 38/15009  
**Crème 305 85±5\***



TIGER Drylac® 38/50039  
**Highland 305 85±5\***



TIGER Drylac® 38/70061  
**Grey Classic 314 85±5\***



TIGER Drylac® 38/90003  
**Argento 301 Metallic**



TIGER Drylac® 38/10007  
**Bianco 302 85±5\***



TIGER Drylac® 38/15007  
**Crème 303 85±5\***



TIGER Drylac® 38/50040  
**Highland 306 85±5\***



TIGER Drylac® 38/80002  
**Carbon 301 85±5\***



TIGER Drylac® 38/90010  
**Marine Silver**



TIGER Drylac® 38/10090  
**Extrusion White 85±5\***



TIGER Drylac® 38/15005  
**Crème 301 85±5\***



TIGER Drylac® 38/50041  
**Highland 307 85±5\***



TIGER Drylac® 38/90007  
**Argento 305 Metallic**



TIGER Drylac® 38/70032  
**Grey Classic 303 85±5\***



TIGER Drylac® 38/60026  
**Marrone 306 85±5\***



TIGER Drylac® 38/40033  
**Azzurro 307 85±5\***



TIGER Drylac® 38/90011  
**Argento 308 Metallic**



TIGER Drylac® 38/70056  
**Grey Classic 310 85±5\***



TIGER Drylac® 38/60039  
**Marrone 308 85±5\***



TIGER Drylac® 38/70054  
**Grey Classic 308 85±5\***



TIGER Drylac® 38/90015  
**Pearl Dark Grey Metallic**

# Bureau of Land Management Standard Environmental Colors



TIGER Drylac<sup>®</sup> 38/90016  
**Argento 312 Metallic**



TIGER Drylac<sup>®</sup> 38/50043  
**Highland 301 Metallic**



TIGER Drylac<sup>®</sup> 38/15021  
**Champagne 304 Metallic**



TIGER Drylac 38/16500  
**BLM Carlsbad Canyon Brown 55±5**



TIGER Drylac 38/60400  
**BLM Sudan Brown 65±5**



TIGER Drylac<sup>®</sup> 38/90018  
**Argento 314 Metallic**



TIGER Drylac<sup>®</sup> 38/40127  
**Pearl Night Blue Metallic**



TIGER Drylac<sup>®</sup> 38/20013  
**Deore 301 Metallic**



TIGER Drylac 38/50500  
**BLM Covert Green 55±5**



TIGER Drylac 38/50400  
**BLM Beetle 65±5**



TIGER Drylac<sup>®</sup> 38/60060  
**Medium Bronze Metallic\***



TIGER Drylac<sup>®</sup> 38/20014  
**Deore 302 Metallic**



TIGER Drylac<sup>®</sup> 38/15020  
**Champagne 303 Metallic**



TIGER Drylac 38/71700  
**BLM Shadow Gray 60±5**



TIGER Drylac 38/53000  
**BLM Yuma Green 60±5**



TIGER Drylac<sup>®</sup> 38/60064  
**Pearl Copper Metallic**



TIGER Drylac<sup>®</sup> 38/15018  
**Champagne 302 Metallic**



TIGER Drylac<sup>®</sup> 38/90009  
**Argento 307 Metallic**



TIGER Drylac 38/51400  
**BLM Juniper Green 60±5**



TIGER Drylac 38/60500  
**BLM Carob Brown 60±5**



TIGER Drylac<sup>®</sup> 38/50035  
**Seafoam Green Metallic**



TIGER Drylac<sup>®</sup> 38/15017  
**Champagne 301 Metallic**



TIGER Drylac<sup>®</sup> 38/91020  
**Anodized Silver**



TIGER Drylac 38/52600  
**BLM Shale Green 60±5**

\*Gloss level according to Gardner 60° ASTM D523. Paper and ink limitations of color samples as well as influence from heat and light account for differences from actual powder coatings.